## SPA-2-18-20 Solid State Power Amplifier

(2GHz - 18GHz, 20W)

#### **Key Features**

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Extremely load-resistant
- Built-in control, monitoring and protection circuits
- Over voltage, over temperature, overdrive and over VSWR protection
- CE, RoHS certification



#### Overview

Saluki SPA-2-18-20 is a solid-state RF power amplifier with an output frequency of 2GHz to 18GHz and an output power of 20W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

### **Technical Specifications**

| SPA-2-18-20        |              |                 |               |  |
|--------------------|--------------|-----------------|---------------|--|
| Frequency Range    | 2GHz - 18GHz | Harmonic        | -10dBc (max.) |  |
| Rated Output Power | 20W (min.)   | Spurious        | -60dBc (max.) |  |
| Input Power        | 0dBm (max.)  | Input VSWR      | 2:1 (max.)    |  |
| Gain               | 43dB (min.)  | Noise Floor     | -40dBm (max.) |  |
| Gain Flatness      | ± 5dB (max.) | Adjustable Gain | 20dB (max.)   |  |

Add: No.1-2 Section 5, Zhongxiao East Rd, Xinyi District, Taipei, Taiwan.

Tel: +886. 909 602 109
Email: sales@salukitec.com
Web: www.salukitec.com




# SPA-2-18-20 Solid State Power Amplifier

(2GHz - 18GHz, 20W)

| Input Port            | SMA (female) | Output Port     | SMA (female)            |
|-----------------------|--------------|-----------------|-------------------------|
| Control Interface     | RS485        | Power Supply    | AC 220V±10%,<br>50/60Hz |
| Dimension             | 412X260X104  | Cooling Type    | Air cooling             |
| Operating Temperature | 0 to 50℃     | Input Impedance | 50                      |


#### **Outline Structure:**

The following appearance and structure are for reference only. The specific dimensions are subject to the actual object.

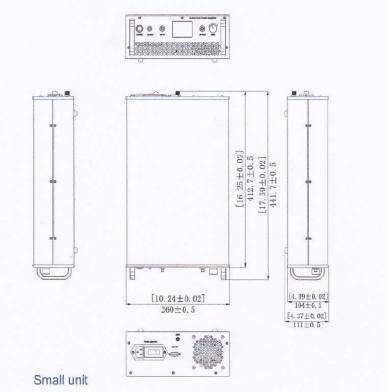

## Options:

| Module No. | Item                             |
|------------|----------------------------------|
| 001        | Forward/reverse power monitoring |
| 002        | GPIB programmable interface      |
| 003        | LAN bus programmable interface   |

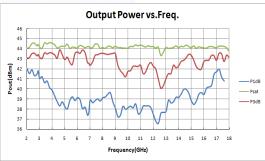

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.

Add: No.1-2 Section 5, Zhongxiao East Rd, Xinyi District, Taipei, Taiwan.

Tel: +886. 909 602 109 Email: sales@salukitec.com Web: www.salukitec.com

