

Features

- SSS Filter - Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss
- Designs that Cover up to 40 GHz Also Available



Parameter		Min.	Typ.	Max.	Units
Frequency Range		DC		2	GHz
Insertion Loss			1.0	1.1	dB
Pass Band Ripple			0.8	1.0	dB
VSWR			1.3	1.5	: 1
Rejection	@2.3-6GHz	50	55		dB
Power Rating	Average			15	W
	Peak (10% Duty Cycle, 1 us Pulse Width)			100	W
Impedance		50			Ohms
Weight		3.6 Max.			Ounces
Input / Output Connectors		SMA-Female			
Material		Aluminum			
Finish		Gray Paint			
Package		Hermetically Sealed (Laser Welded)			

SALUKI TECHNOLOGY INC. Hermetically Sealed SSS Low Pass Filter DC-2GHz
Environmental Specifications

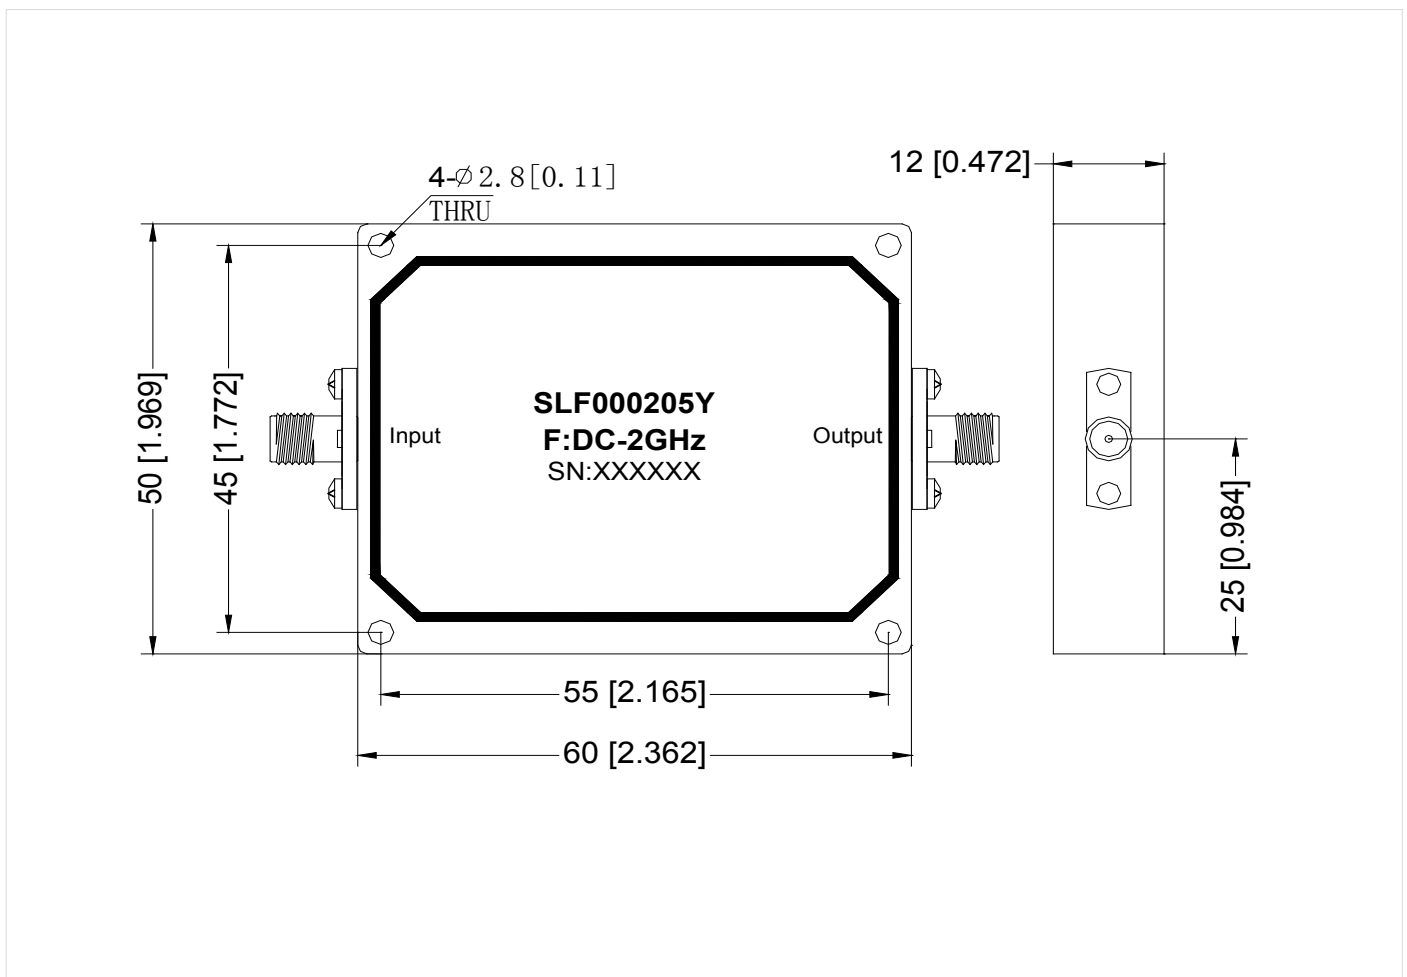
Operational Temperature	-55°C~+85°C
Storage Temperature	-55°C~+125°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
(Optional)	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions

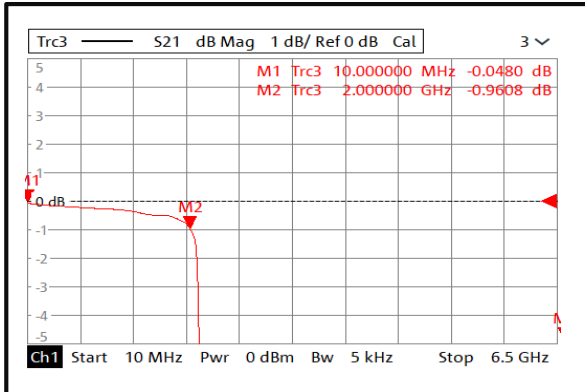
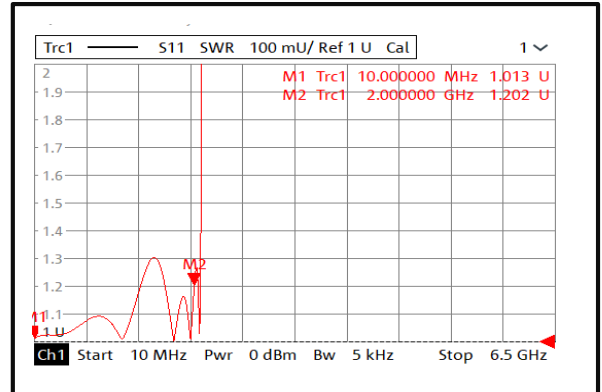
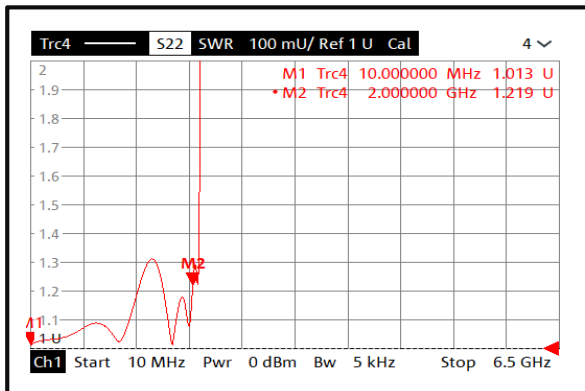
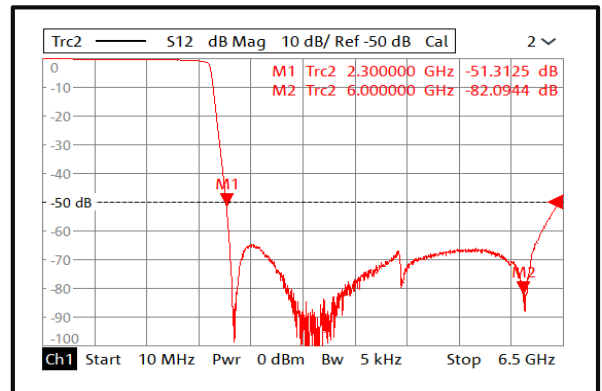
Outline Drawing:

All Dimensions in mm (inches)

Outline Tolerances ±0.5 (0.02)

Mounting Hole Tolerances ±0.2 (0.008)



Insertion Loss

Input VSWR

Output VSWR

Rejection


Saluki and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.salukitec.com for additional datasheets and product information.