

Features

- SSS Filter - Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss
- Covers the 1 GHz to 18 GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
- Designs that Cover up to 40 GHz Also Available
- MIL-E-5400 standard



| Parameters | | Min. | Typ. | Max. | Units |
|---------------------------|--|------------|------|------|--------|
| Frequency Range | | DC | | 3 | GHz |
| Insertion Loss | | | 0.85 | 1.0 | dB |
| Pass Band Ripple | | | 0.8 | 1.0 | dB |
| VSWR | | | 1.3 | 1.5 | : 1 |
| Rejection | @3.45-8GHz | 50 | 58 | | dB |
| Power Rating | Average | | | 15 | W |
| | Peak(10% Duty Cycle, 1 us Pulse Width) | | | 100 | W |
| Impedance | | 50 | | | Ohms |
| Weight | | 2.0 Max. | | | Ounces |
| Input / Output Connectors | | SMA-Female | | | |
| Material | | Aluminum | | | |
| Finish | | Gray Paint | | | |

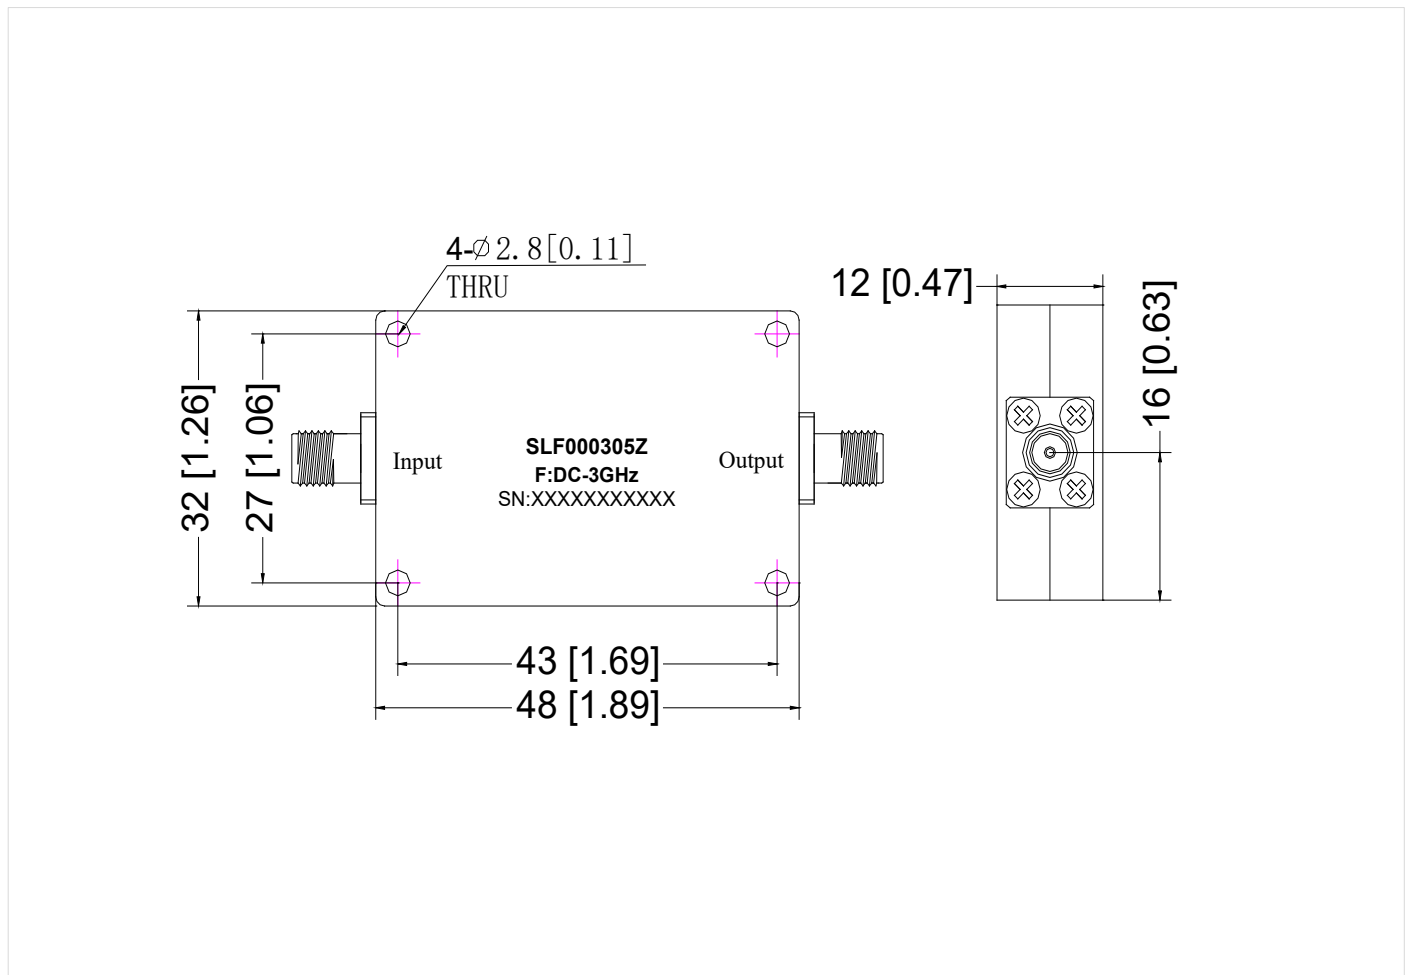
Environmental Specifications

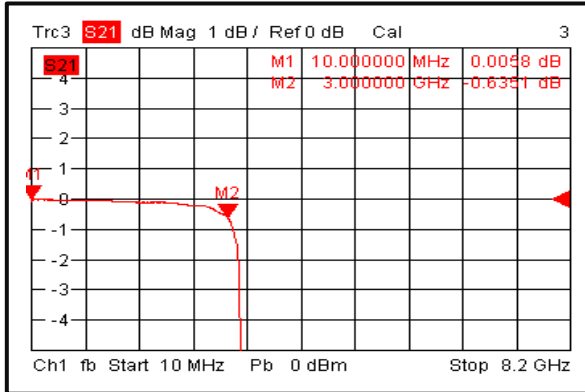
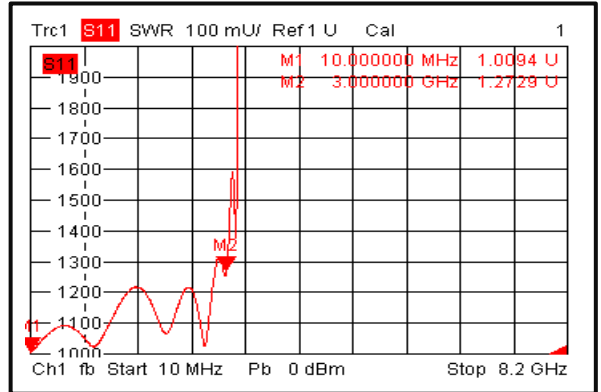
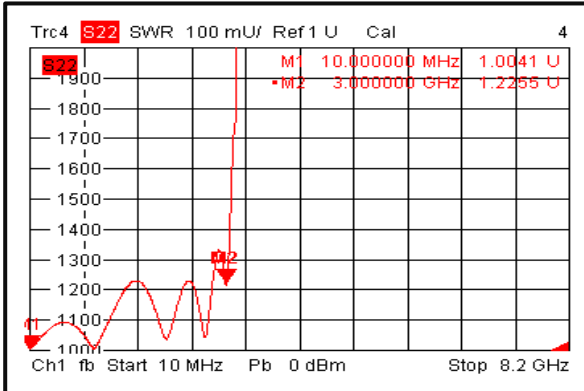
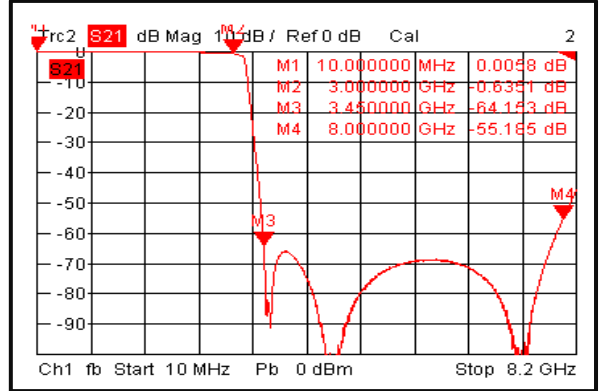
| | |
|-------------------------|---|
| Operational Temperature | -55°C~+85°C |
| Storage Temperature | -55°C~+125°C |
| Altitude | 30,000 ft. (Epoxy Sealed Controlled environment) |
| (Optional) | 60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) |
| Vibration | 25g RMS (15 degrees 2KHz) endurance, 1 hour per axis |
| Humidity | 100% RH at 35°C, 95%RH at 40°C |
| Shock | 20G for 11msec half sine wave,3 axis both directions |

Outline Drawing:

All Dimensions in mm (inches)

 Outline Tolerances ± 0.5 (0.02)

 Mounting Hole Tolerances ± 0.2 (0.008)


Loss

Input VSWR

Output VSWR

Rejection


Saluki and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.salukitec.com for additional datasheets and product information.